BRAIDING MACHINES

Round rope · Flat braid · Specialty braid · Metal wire



FX90-4JD-36-2

EQUIPMENT & ACCESSORIES

Machine series, model specifications, winding equipment and replacement parts.

CATALOGUE GUIDE

Find the right series

Select a product structure, then compare spindle count, head arrangement and bobbin size.

01 **ROUND ROPE** — 80 / 90 series — 03–06

02 **FLAT BRAID** — 80 / 90 series — 07–09

03 **ADDITIONAL MACHINE SERIES** — 110 / 130 / 180 / 320 — 10–12

04 **SPECIALTY BRAID** — FX series — 13–15

05 **METAL WIRE** — 115B / 160B series — 16–17

06 **PARTS & AUXILIARY EQUIPMENT** — Carriers, drive parts, feeders and winders — 18–20

HEAD ARRANGEMENT KEY

A

2 + 2 heads

H

4 heads in a straight row

AH

4 + 4 heads

01 / ROUND ROPE

80 series

High-speed round-rope braiding machine model range.

Ø43 × 140 mm
Bobbin size

340 rpm
Max. horn gear speed

12–48
Spindles per head

Model	Spindles / head	Head qty	Power (kW)	Worktable (cm)	Rope Ø (mm)
80-12-2	12	2	0.55	83 × 35	0.1–8
80-12-4-A	12	4	0.75	94 × 79	0.1–8
80-12-4-H	12	4	0.75	148 × 40	0.1–8
80-16-2	16	2	0.55	87 × 45	0.1–8
80-16-4-H	16	4	0.75	165 × 44	0.1–8
80-16-4-A	16	4	0.75	93 × 75	0.1–8
80-20-2	20	2	0.75	100 × 48	0.1–8
80-20-4-H	20	4	0.75	183 × 48	0.1–8
80-24-2	24	2	0.75	104 × 56	0.5–12
80-32-2	32	2	0.75	127 × 62	1–15
80-48-2	48	2	1.1	162 × 82	3–20

Worktable dimensions are L × W in cm. Spindle quantity is per head.

ROUND-ROPE PRODUCT EXAMPLES



Examples include cords, shoelaces and braided sleeves. Select materials and construction to suit the application.

01 / ROUND ROPE

90 series

Round-rope configurations from 8 to 96 spindles per head.

BOBBIN Ø48 × 140 mm

MAX. HORN GEAR SPEED 300 rpm

Model	Spindles / head	Head qty	Power (kW)	Worktable (cm)	Rope Ø (mm)
90-8-8-AH	8	8	0.55	177 × 54	0.1–8
90-12-2	12	2	0.55	83 × 35	0.1–8
90-12-4-A	12	4	0.75	94 × 79	0.1–8
90-12-8-AH	12	8	1.1	170 × 79	0.1–8
90-12-4-H	12	4	0.75	151 × 54	0.1–8
90-16-2	16	2	0.55	93 × 46	0.1–8
90-16-4-H	16	4	0.75	177 × 54	0.1–8
90-16-4-A	16	4	0.75	93 × 75	0.1–8
90-20-2	20	2	0.75	109 × 50	0.1–8
90-20-4-H	20	4	1.1	199 × 50	0.1–8
90-24-2	24	2	0.75	113 × 58	0.5–12
90-24-4-H	24	4	1.1	220 × 61	0.5–12
90-32-1	32	1	0.75	77 × 71	1–15
90-32-2	32	2	0.75	137 × 69	1–15
90-40-1	40	1	1.1	96 × 85	2–16
90-40-2	40	2	1.1	160 × 81	2–16
90-40-2-2T	40	2	1.1	160 × 81	2–16
90-44-1	44	1	1.1	99 × 89	2–20
90-44-2	44	2	1.5	171 × 89	2–20
90-48-1	48	1	0.75	99 × 90	3–20
90-48-2	48	2	1.5	178 × 93	3–20
90-56-1	56	1	0.75 × 2	123 × 105	3–20
90-64-1	64	1	0.75 × 2	122 × 118	4–25
90-72-1	72	1	0.75 × 2	140 × 150	4–25
90-80-1	80	1	0.75 × 2	140 × 150	4–25
90-96-1	96	1	0.75 × 3	160 × 166	5–30

Worktable dimensions are L × W in cm. Spindle quantity is per head.

01 / ROUND ROPE

90 series · model gallery

Selected machine configurations from the series.



90-32-2

32 spindles / head · 2 heads



90-16-4-A

16 spindles / head · 2 + 2 heads



90-16-4-H

16 spindles / head · 4 heads



90-40-2-2T

40 spindles / head · 2 heads

01 / ROUND ROPE

Single-head configurations

Two examples from the 90 series round-rope range.



90-48-1

48 spindles · 3–20 mm rope Ø



90-96-1

96 spindles · 5–30 mm rope Ø

Model	Spindles / head	Head qty	Power (kW)	Worktable (cm)	Rope Ø (mm)
90-48-1	48	1	0.75	99 × 90	3–20
90-96-1	96	1	0.75 × 3	160 × 166	5–30

Worktable dimensions are L × W in cm. Spindle quantity is per head. Both use Ø48 × 140 mm bobbins; max. horn gear speed is 300 rpm.

Additional single-head and two-head models are listed in the 90 series specification table on page 04.

02 / FLAT BRAID

80 series

Flat-braid and narrow-tape machine configurations.

Ø43 × 140 mm
Bobbin size

340 rpm
Max. horn gear speed

13–33
Spindles per head

Model	Spindles / head	Heads	Power (kW)	Worktable (cm)
80-13-2	13	2	0.55	83 × 35
80-13-4-H	13	4	0.75	148 × 40
80-13-4-A	13	4	0.75	94 × 79
80-17-2	17	2	0.55	87 × 45
80-17-4-H	17	4	0.75	165 × 44
80-21-2	21	2	0.75	100 × 48
80-21-4-H	21	4	0.75	183 × 48
80-25-2	25	2	0.75	104 × 56
80-29-2	29	2	0.75	112 × 60
80-33-2	33	2	0.75	127 × 62

Worktable dimensions are L × W in cm. Spindle quantity is per head.

FLAT-BRAID PRODUCT EXAMPLES



Flat cords, decorative trims and elastic braid constructions, depending on the machine setup and yarn.

02 / FLAT BRAID

90 series

Model range with 9 to 65 spindles per head.

Ø48 × 140 mm
Bobbin size

300 rpm
Max. horn gear speed

1 / 2 / 4 / 8
Head quantities


Model	Spindles / head	Heads	Power (kW)	Worktable (cm)
90-9-8-AH	9	8	1.5	177 × 54
90-13-2	13	2	0.55	82 × 39
90-13-4-H	13	4	0.75	151 × 54
90-13-4-A	13	4	0.75	94 × 79
90-13-8-XH	13	8	1.1	220 × 61
90-17-2	17	2	0.55	93 × 46
90-17-4-H	17	4	0.75	177 × 54
90-21-2	21	2	0.75	109 × 50
90-21-4-H	21	4	1.1	199 × 50
90-25-2	25	2	0.75	113 × 58
90-25-4-H	25	4	1.1	220 × 61
90-33-1	33	1	0.75	77 × 71
90-33-2	33	2	0.75	137 × 69
90-45-1	45	1	1.1	99 × 89
90-45-2	45	2	1.5	171 × 89
90-57-1	57	1	0.75 × 2	123 × 105
90-65-1	65	1	0.75 × 2	122 × 118

Worktable dimensions are L × W in cm. Spindle quantity is per head.

02 / FLAT BRAID

90 series · model gallery

Selected machine configurations from the series.

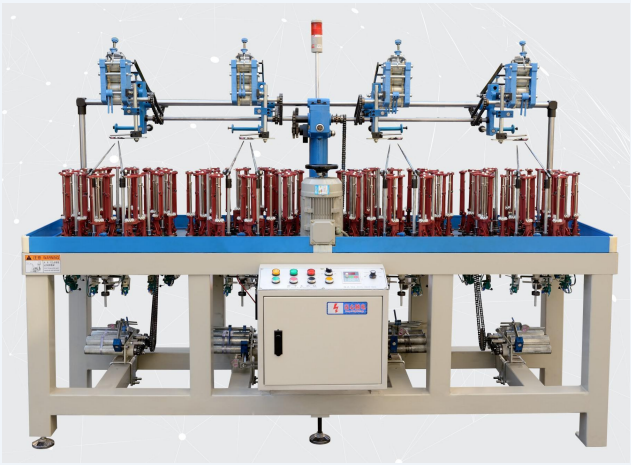

90-25-4-H

25 spindles / head · 4 heads



90-13-4-H

13 spindles / head · 4 heads



90-25-2

25 spindles / head · 2 heads



90-9-8-AH

9 spindles / head · 4 + 4 heads

03 / OTHER ROUND-ROPE SERIES

110 / 130 / 320 series

Round-rope model specifications and bobbin dimensions.

Model	Spindles / head	Head qty	Power (kW)	Bobbin (mm)	Worktable (cm)	Rope Ø (mm)
110-8-4-H	8	4	0.75	Ø48 × 140	147 × 44	0.1–5
110-8-8-AH	8	8	1.1	Ø48 × 140	142 × 70	0.1–5
130-8-4-A	8	4	1.1	Ø70 × 210	95 × 87	8–20
130-16-2	16	2	0.75	Ø70 × 210	120 × 64	8–20
130-24-1	24	1	1.1	Ø70 × 210	96 × 85	8–20
130-32-1	32	1	1.1	Ø70 × 210	108 × 95	8–25
130-48-1	48	1	1.1	Ø70 × 210	136 × 126	8–25
320-12-1	12	1	1.5 × 2	Ø150 × 380	140 × 130	6–30

Worktable dimensions are L × W in cm. Spindle quantity is per head.



110-8-8-AH



320-12-1

03 / OTHER ROUND-ROPE SERIES

130 / 320 · model gallery

Selected machine configurations from the series.



130-24-1

Ø70 × 210 mm bobbins



130-32-1

Ø70 × 210 mm bobbins



130-36-1

Machine configuration reference



320-12-1

Ø150 × 380 mm bobbins

03 / OTHER FLAT-BRAID SERIES

110 / 130 / 180 series

Flat-braid model range with bobbin dimensions.

Model	Spindles / head	Heads	Power (kW)	Bobbin (mm)	Worktable (cm)
110-9-4-H	9	4	0.75	Ø48 × 140	147 × 44
130-25-1	25	1	1.1	Ø70 × 210	96 × 85
130-33-1	33	1	1.1	Ø70 × 210	108 × 95
180-17-1	17	1	0.75	Ø100 × 330	100 × 98

Worktable dimensions are L × W in cm. Spindle quantity is per head.



110-9-4-H

Standard arrangement



110-9-4-H

Additional machine view

04 / SPECIALTY BRAID


FX series

Specialty braiding configurations for decorative cords and trims.

Model	Spindles / head	Head qty	Power (kW)	Bobbin (mm)	Worktable (cm)
FX-25-2	25	2	1.1	Ø48 × 140	177 × 87
FX-64-1	64	1	1.1	Ø48 × 140	120 × 92
FX80-31-1	31	1	0.75	Ø43 × 140	84 × 75
FX90-4JD-28-2	28	2	1.1	Ø48 × 140	160 × 76
FX90-4JD-36-2	36	2	1.1	Ø48 × 140	160 × 76
FX90-26-2	26	2	0.75	Ø48 × 140	141 × 56
FX90-39-2	39	2	0.75	Ø48 × 140	192 × 87
FX90-46-1	46	1	1.1	Ø48 × 140	80 × 75
FX90-67-1	67	1	0.75 × 2	Ø48 × 140	150 × 130
FX90-73-1	73	1	1.1	Ø48 × 140	124 × 95
FX90-77-1	77	1	1.1	Ø48 × 140	124 × 110
FX130-9-2	9	2	1.1	Ø70 × 210	95 × 87
FX-3GS-4A	16	4	0.75	Ø48 × 140	177 × 54

Worktable dimensions are L × W in cm. Spindle quantity is per head.

DECORATIVE BRAID EXAMPLES

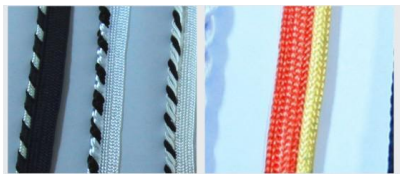

04 / SPECIALTY BRAID


Decorative braid configurations

Selected FX models and their spindle / head arrangements.



FX90-4JD-36-2

36 spindles / head · 2 heads · 1.1 kW

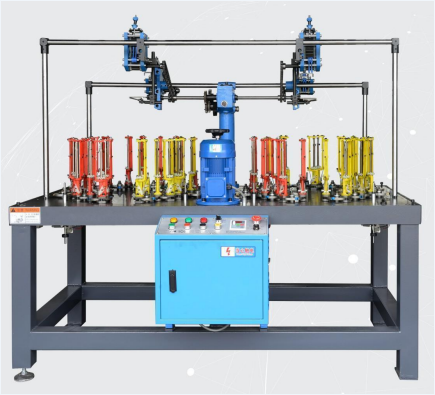

FX-25-2

25 spindles / head · 2 heads



FX-64-1

64 spindles · 1 head

04 / SPECIALTY BRAID

FX series · model gallery

Selected machine configurations from the series.



FX80-31-1

31 spindles · 1 head



FX-3GS-4A

16 spindles / head · 4 heads



FX90-77-1

77 spindles · 1 head



FX130-9-2

9 spindles / head · 2 heads

05 / METAL WIRE

115B / 160B series

Metal-wire braiding machines for hose and sleeve constructions.

Model	Spindle qty	Braiding range (mm)	Overall dimensions L × W × H (mm)	Max. horn gear speed (rpm)	Bobbin size (mm)
115B-24	24	≤Ø25	1,300 × 720 × 1,650	300	60 × 170
115B-32	32	≤Ø35	1,450 × 850 × 1,700	300	60 × 170
115B-36	36	≤Ø40	1,520 × 1,000 × 1,780	270	60 × 170
115B-48	48	≤Ø50	1,650 × 1,400 × 1,900	270	60 × 170
160B-24	24	≤Ø35	1,400 × 900 × 1,800	270	70 × 280
160B-36	36	≤Ø45	1,500 × 1,000 × 1,800	270	70 × 280

Dimensions in this table are overall machine dimensions in mm. Braiding ranges are shown as listed diameters.

METAL-WIRE BRAID PRODUCT EXAMPLES



Select a model by the required braid diameter, spindle count, wire specification and hose or sleeve construction.

05 / METAL WIRE

Metal-wire machine configurations

Selected machine configurations from the series.



115B-24

115B-24 · enclosed arrangement



115B-24

24 spindles · listed range ≤Ø25 mm



115B-32

32 spindles · listed range ≤Ø35 mm



115B-36

36 spindles · listed range ≤Ø40 mm

06 / ACCESSORIES

Carriers, bobbins & yarn guides

Replacement components for the braiding system.



Braiding carriers



Carrier components




Metal-wire carriers



Bobbins



Ceramic yarn guides



Washers



Connector block



Yarn threading plates



Core guide wheel

Match carrier and guide components to the machine model, yarn path and bobbin specification.

06 / ACCESSORIES

Drive & take-up components

Transmission, density adjustment and yarn handling parts.



Carrier sliders



Motor gear



Handwheel



Horn gear oil cups



Oil dipstick



Thread-break stop block



Sprockets



Fixed density gear



Density adjustment gears




Geared take-up wheel

Provide the machine model and a component photo when enquiring about replacement parts.


06 / AUXILIARY EQUIPMENT

Feeders, rollers & winding


Supporting equipment for yarn preparation and take-up.

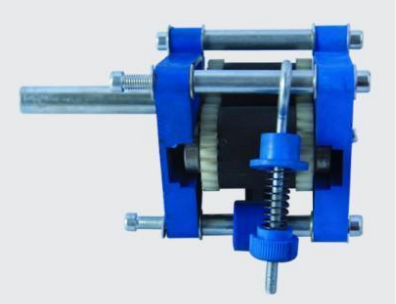

Two-wheel take-up roller

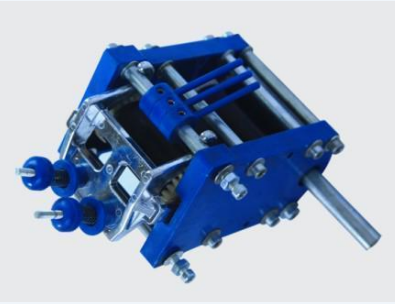

Four-wheel take-up roller



Elastic yarn feeder



Metal-wire winding machine



Bobbin winding machine

YOUR NEXT BRAIDING PROJECT

Share your product sample and production requirements with YISHUO.

INFORMATION FOR MODEL SELECTION

01 Finished braid

Round rope, flat braid, decorative trim or wire braid

02 Material & size

Yarn or wire specification and finished product dimensions

03 Production target

Required construction, braid density and output

04 Site requirements

Available power supply and installation space

Ningbo Yishuo Machinery & Electron Co., Ltd.

nbyishuo.com

lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-2/300 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	2
Reed width	300 mm
Heald frames	14
Pattern cycle	8-48
Motor	2 HP
Speed	200 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-2/200 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	2
Reed width	200 mm
Heald frames	14
Pattern cycle	8-48
Motor	2 HP
Speed	350 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-2/165 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	2
Reed width	165 mm
Heald frames	14
Pattern cycle	8-48
Motor	2 HP
Speed	500 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-4/130 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	4
Reed width	130 mm
Heald frames	16
Pattern cycle	8-48
Motor	1.5 HP
Speed	800 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-4/80 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	4
Reed width	80 mm
Heald frames	16
Pattern cycle	8-48
Motor	1.5 HP
Speed	1400 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-8/35 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heald frames	15
Pattern cycle	8-48
Motor	1.5 HP
Speed	1400 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-8/30 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heald frames	15
Pattern cycle	8-48
Motor	1.5 HP
Speed	1400 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-10/25 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heald frames	15
Pattern cycle	8-48
Motor	1.5 HP
Speed	1400 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-12/20 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Reed width	20 mm
Heald frames	16
Pattern cycle	8-48
Motor	1.5 HP
Speed	1400 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-S-1/500 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	1
Reed width	500 mm
Heald frames	14
Pattern cycle	8-40
Motor	2 HP
Speed	200 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-S-10/45 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	10
Reed width	45 mm
Heald frames	16
Pattern cycle	8-48
Motor	1.5 HP
Speed	1400 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-S-10/30 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	10
Reed width	30 mm
Heald frames	16
Pattern cycle	8-48
Motor	1.5 HP
Speed	1400 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-S-8/55 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	8
Reed width	55 mm
Heald frames	16
Pattern cycle	8-48
Motor	1.5 HP
Speed	1400 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-S-6/80 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	6
Reed width	80 mm
Heald frames	16
Pattern cycle	8-48
Motor	1.5 HP
Speed	1400 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-S-6/65 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	6
Reed width	65 mm
Heald frames	16
Pattern cycle	8-40
Motor	1.5 HP
Speed	1400 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-S-12/30 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	12
Reed width	30 mm
Heald frames	14
Pattern cycle	8-40
Motor	1.5 HP
Speed	1400 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-D-6/55 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	6
Reed width	55 mm
Heald frames	20
Pattern cycle	8-40
Motor	2 HP
Speed	1400 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-D-8/35 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	8
Reed width	35 mm
Heald frames	20
Pattern cycle	8-48
Motor	2 HP
Speed	1400 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-D-10/30 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Reed width	30 mm
Heald frames	20
Pattern cycle	8-48
Motor	2 HP
Speed	1400 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-D-12/20 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Reed width	20 mm
Heald frames	20
Pattern cycle	8-48
Motor	2 HP
Speed	1400 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-D-4/65 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	4
Reed width	65 mm
Heald frames	20
Pattern cycle	8-48
Motor	2 HP
Speed	1400 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-D-6/42 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	6
Reed width	42 mm
Heald frames	20
Pattern cycle	8-40
Motor	2 HP
Speed	1400 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-D-8/27 Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	8
Reed width	27 mm
Heald frames	20
Pattern cycle	8-48
Motor	2 HP
Speed	1400 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-Z-10/30 Zipper Tape Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	10
Reed width	30 mm
Heald frames	12
Pattern cycle	8
Motor	1.5 HP
Speed	1700 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-Z-12/30 Zipper Tape Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	12
Reed width	30 mm
Heald frames	12
Pattern cycle	8
Motor	1.5 HP
Speed	1700 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-Z-14/20 Zipper Tape Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	14
Reed width	20 mm
Heald frames	20
Pattern cycle	8-48
Motor	2 HP
Speed	1700 rpm
Weft density	3.5-36.7 picks/cm

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-J-2/165 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	2
Reed width	165 mm
Heald frames	6
Jacquard hooks	128, 192, 240, 320, 384, 480, 640
Speed	600-800 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-J-2/110 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	2
Reed width	110 mm
Heald frames	6
Jacquard hooks	128, 192, 240, 320, 384, 480, 640
Speed	700-900 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-J-4/80 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	4
Reed width	80 mm
Heald frames	8
Jacquard hooks	128, 192, 240, 320, 384, 480, 640
Speed	700-900 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-J-6/55 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	6
Reed width	55 mm
Heald frames	8
Jacquard hooks	128, 192, 240, 320, 384, 480, 640
Speed	800-1000 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-J-8/45 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	8
Reed width	45 mm
Heald frames	8
Jacquard hooks	128, 192, 240, 320, 384
Speed	800-1000 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-J-8/35 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	8
Reed width	35 mm
Heald frames	8
Jacquard hooks	128, 192, 240
Speed	800-1000 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-J-10/25 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	10
Reed width	25 mm
Heald frames	8
Jacquard hooks	128, 192, 240
Speed	800-1000 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSJ-C-2/165 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	2
Reed width	165 mm
Heald frames	6
Jacquard hooks	128, 192, 240, 320, 384, 480, 640
Speed	600-800 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSJ-C-2/110 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	2
Reed width	110 mm
Heald frames	6
Jacquard hooks	128, 192, 240, 320, 384, 480, 640
Speed	700-900 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSJ-C-4/80 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	4
Reed width	80 mm
Heald frames	8
Jacquard hooks	128, 192, 240, 320, 384, 480, 640
Speed	700-900 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSJ-C-6/55 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	6
Reed width	55 mm
Heald frames	8
Jacquard hooks	128, 192, 240, 320, 384, 480, 640
Speed	800-1000 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSJ-C-8/45 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	8
Reed width	45 mm
Heald frames	8
Jacquard hooks	128, 192, 240, 320, 384
Speed	800-1000 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSJ-C-8/35 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	8
Reed width	35 mm
Heald frames	8
Jacquard hooks	128, 192, 240
Speed	800-1000 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSJ-C-10/25 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	10
Reed width	25 mm
Heald frames	8
Jacquard hooks	128, 192, 240
Speed	800-1000 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSJ-H-2/165 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	2
Reed width	165 mm
Heald frames	6
Jacquard hooks	128, 192, 240, 320, 384, 480, 640
Speed	600-800 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSJ-H-2/110 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	2
Reed width	110 mm
Heald frames	6
Jacquard hooks	128, 192, 240, 320, 384, 480, 640
Speed	700-900 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSJ-H-4/80 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	4
Reed width	80 mm
Heald frames	8
Jacquard hooks	128, 192, 240, 320, 384, 480, 640
Speed	700-900 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSJ-H-6/55 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	6
Reed width	55 mm
Heald frames	8
Jacquard hooks	128, 192, 240, 320, 384, 480, 640
Speed	800-1000 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSJ-H-8/45 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	8
Reed width	45 mm
Heald frames	8
Jacquard hooks	128, 192, 240, 320, 384
Speed	800-1000 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSJ-H-8/35 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	8
Reed width	35 mm
Heald frames	8
Jacquard hooks	128, 192, 240
Speed	800-1000 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSJ-H-10/25 Jacquard Needle Loom

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Heads	10
Reed width	25 mm
Heald frames	8
Jacquard hooks	128, 192, 240
Speed	800-1000 rpm
Pattern cycle	8-48

CONFIGURATION

Yarn-break stop / Automatic circulating lubrication / Rubber yarn feeder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSA-40 High-speed Warp Knitting Machine

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Working width	40 in
Needle gauge	18 gauge / 4 bars
Speed	1,400 rpm
Yarn let-off	Electronic / creel
Electrical cabinet	500 x 400 x 1,700 mm
Packing dimensions	1,800 x 900 x 1,700 mm
Net weight	2,500 kg
Reference output	20 mm tapes: approx. 35-38 lines; 25-26 m/h/line
Materials	Synthetic, natural and blended yarns; spandex

CONFIGURATION

Variable frequency control / Yarn-break stop

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YS-JL64 Computerized Lace Knitting Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Spindles	64
Working width	150 mm
Speed	150-180 rpm
Motor	1.5 HP

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YS-JL96 Computerized Lace Knitting Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Spindles	96
Working width	250 mm
Speed	150-180 rpm
Motor	2 HP

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSJ-S400/B3 Crochet Knitting Machine

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Working width	30 Inches
Weft bars	3bars
Tape width	Standard 0.2-5.5 cm; special 10-60 cm
Needle gauge	12,14,15,18,20
Weft density	5-25/cm
Pattern chain cycle	12 standard / 12-50 extended
Motor	1.5HP
Speed	1500 R.P.M
Machine dimensions	1650x700x1750 mm
Beam positions	4-8
Yarn creel	260 Ends (130 Ends Left and 130 Ends Right)

CONFIGURATION

Variable frequency control / Rubber yarn feeder / Yarn-break stop

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSJ-S900/B8 Crochet Knitting Machine

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Working width	30 Inches
Weft bars	8bars
Tape width	Standard 0.2-5.5 cm; special 10-60 cm
Needle gauge	12,14,15,18,20
Weft density	5-25/cm
Pattern chain cycle	12 standard / 12-50 extended
Motor	2HP
Speed	1500 R.P.M
Machine dimensions	1750x700x1750 mm
Beam positions	4-8
Yarn creel	300 Ends (150 Ends Left and 150 Ends Right)

CONFIGURATION

Variable frequency control / Rubber yarn feeder / Yarn-break stop

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-T C609/B8 Computerized crochet

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Working width	600 mm
Weft bars	8
Main motor	1.5 kW / 380 V
Yarn creel	308
Net weight	900 kg
Drop-frame weight	50 kg
Creel weight	220 kg

CONFIGURATION

Variable frequency control / Yarn-break stop

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-T C609/B12 Computerized crochet

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Working width	600 mm
Main motor	1.5 kW / 380 V
Yarn creel	308
Net weight	900 kg
Drop-frame weight	50 kg
Creel weight	220 kg

CONFIGURATION

Variable frequency control / Yarn-break stop

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSY-T C609/B16 Computerized crochet

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Working width	600 mm
Weft bars	16
Main motor	1.5 kW / 380 V
Yarn creel	308
Net weight	950 kg
Drop-frame weight	50 kg
Creel weight	220 kg

CONFIGURATION

Variable frequency control / Yarn-break stop

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-4/8 Braiding Machine

Product configuration and technical specifications.

YSX-4/8

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	4
Carriers per head	8
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-6/8 Braiding Machine

Product configuration and technical specifications.

YSX-6/8

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	6
Carriers per head	8
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-8/8 Braiding Machine

Product configuration and technical specifications.

YSX-8/8

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	8
Carriers per head	8
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-4/12 Braiding Machine

Product configuration and technical specifications.

YSX-4/12

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	4
Carriers per head	12
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-4/16 Braiding Machine

Product configuration and technical specifications.

YSX-4/16

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	4
Carriers per head	16
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-6/16 Braiding Machine

Product configuration and technical specifications.

YSX-6/16

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	6
Carriers per head	16
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-2/24 Braiding Machine

Product configuration and technical specifications.

YSX-2/24

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	2
Carriers per head	24
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-2/26 Braiding Machine

Product configuration and technical specifications.

YSX-2/26

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	2
Carriers per head	26
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-2/32 Braiding Machine

Product configuration and technical specifications.

YSX-2/32

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	2
Carriers per head	32
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-2/36 Braiding Machine

Product configuration and technical specifications.

YSX-2/36

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	2
Carriers per head	36
Motor	1.1 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-2/40 Braiding Machine

Product configuration and technical specifications.

YSX-2/40

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	2
Carriers per head	40
Motor	1.1 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-1/44 Braiding Machine

Product configuration and technical specifications.

YSX-1/44

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	1
Carriers per head	44
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-1/48 Braiding Machine

Product configuration and technical specifications.

YSX-1/48

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	1
Carriers per head	48
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-2/48 Braiding Machine

Product configuration and technical specifications.

YSX-2/48

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	2
Carriers per head	48
Motor	0.55x2 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-1/56 Braiding Machine

Product configuration and technical specifications.

YSX-1/56

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	1
Carriers per head	56
Motor	0.55x2 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-1/64 Braiding Machine

Product configuration and technical specifications.

YSX-1/64

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	1
Carriers per head	64
Motor	0.55x2 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-1/72 Braiding Machine

Product configuration and technical specifications.

YSX-1/72

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	1
Carriers per head	72
Motor	0.55x2 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-1/96 Braiding Machine

Product configuration and technical specifications.

YSX-1/96

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	1
Carriers per head	96
Motor	1.1 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-1/120 Braiding Machine

Product configuration and technical specifications.

YSX-1/120

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	1
Carriers per head	120
Motor	0.75x2 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-8/3 Braiding Machine

Product configuration and technical specifications.

YSX-8/3

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	8
Carriers per head	3
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-4/9 Braiding Machine

Product configuration and technical specifications.

YSX-4/9

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	4
Carriers per head	9
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-8/9 Braiding Machine

Product configuration and technical specifications.

YSX-8/9

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	8
Carriers per head	9
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-6/9 Braiding Machine

Product configuration and technical specifications.

YSX-6/9

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	6
Carriers per head	9
Motor	1.1 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-4/13 Braiding Machine

Product configuration and technical specifications.

YSX-4/13

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	4
Carriers per head	13
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-4/17 Braiding Machine

Product configuration and technical specifications.

YSX-4/17

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	4
Carriers per head	17
Motor	1.1 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-4/21 Braiding Machine

Product configuration and technical specifications.

YSX-4/21

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	4
Carriers per head	21
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-2/25 Braiding Machine

Product configuration and technical specifications.

YSX-2/25

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	2
Carriers per head	25
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-4/25 Braiding Machine

Product configuration and technical specifications.

YSX-4/25

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	4
Carriers per head	25
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-2/29 Braiding Machine

Product configuration and technical specifications.

YSX-2/29

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	2
Carriers per head	29
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-2/33 Braiding Machine

Product configuration and technical specifications.

YSX-2/33

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	2
Carriers per head	33
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-2/39 Braiding Machine

Product configuration and technical specifications.

YSX-2/39

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	2
Carriers per head	39
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-2/41 Braiding Machine

Product configuration and technical specifications.

YSX-2/41

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	2
Carriers per head	41
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-2/43 Braiding Machine

Product configuration and technical specifications.

YSX-2/43

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	2
Carriers per head	43
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-1/45 Braiding Machine

Product configuration and technical specifications.

YSX-1/45

Technical configuration

TECHNICAL SPECIFICATIONS

Heads	1
Carriers per head	45
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-1/49 Braiding Machine

Product configuration and technical specifications.

YSX-1/49

Technical configuration

TECHNICAL SPECIFICATIONS

Carriers per head	49
Motor	0.75 kW
Horn-gear speed	360 rpm
Bobbin size	48x140 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.


NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSC-2/18 Braiding Machine

Product configuration and technical specifications.

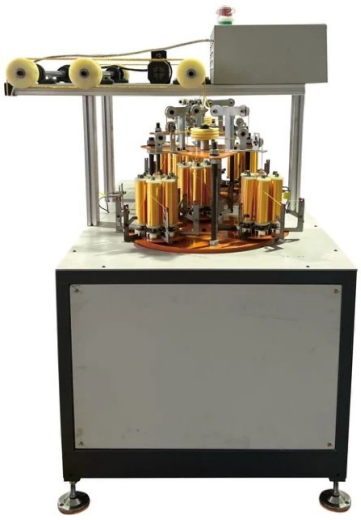

TECHNICAL SPECIFICATIONS

Heads	2
Horn-gear size	90
Motor	1 HP (0.75 kW)
Bobbin size	47 x 142 mm
Cord diameter	0.1-8 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

Cord Twisting Unit

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Equipment type	Cord Twisting Unit

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

Cord Take-up Winder

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Equipment type	Cord Takeup Winder

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSH-SW62 Sewing Thread Winder

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Spindles	6
Bobbins per spindle	1 or 2
Package shapes	Cone, column, horn/bugle
Bobbin size	Cone / horn: 4, 5, 6 in; column: 2 in
Thread length	0-30,000 m
Power supply	3-phase / 380 V / 50 Hz; customizable
Packing dimensions	2.15 x 0.80 x 1.07 m
Net / gross weight	450 / 500 kg

CONFIGURATION

Independent spindle control / Electronic length counter / Silicone oil device / Electronic tension control

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSH-SWH42 Sewing Thread Winder

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Configuration	4 spindles / 2 bobbins each
Bobbin size	4 in
Package diameter	115 mm
Winding speed	900-1,000 m/min
Pattern-back setting	3-4
Power	1.5 kW
Machine dimensions	2.00 x 0.88 x 1.50 m
Net / gross weight	500 / 600 kg

CONFIGURATION

Independent spindle control / Electronic length counter / Silicone oil device / Electronic tension control

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-B626 Computerized Bobbin Winder - 32 spindles

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Spindles	32
Construction	Double-sided
Twist direction	S or Z
Yarn package weight	750 g
Package forming	Computer controlled
Power	3.55 kW

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-B626 Computerized Bobbin Winder - 48 spindles

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Spindles	48
Construction	Double-sided
Twist direction	S or Z
Yarn package weight	750 g
Package forming	Computer controlled
Power	3.55 kW

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-B626 Computerized Bobbin Winder - 64 spindles

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Spindles	64
Construction	Double-sided
Twist direction	S or Z
Yarn package weight	750 g
Package forming	Computer controlled
Power	3.55 kW

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-B626 Computerized Bobbin Winder - 96 spindles

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Spindles	96
Construction	Double-sided
Twist direction	S or Z
Yarn package weight	750 g
Package forming	Computer controlled
Power	3.55 kW

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YS-LD01 Automatic Yarn Rewinding Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Winding mode	Soft winding
Heads	6 per section
Grooved drum	OD 82 mm; pitch 2.5; symmetric 0 degrees
Traverse length	147 mm / 6 in
Power	100 W per head
Power supply	3-phase 440 V, 50/60 Hz

CONFIGURATION

Independent head control

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YS-LD02 Automatic Yarn Rewinding Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Winding mode	Hard winding
Heads	6 per section
Grooved drum	OD 82 mm; pitch 2.5; symmetric 0 degrees
Traverse length	147 mm / 6 in
Power	100 W per head
Power supply	3-phase 440 V, 50/60 Hz

CONFIGURATION

Independent head control

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSF-H01 Ribbon Rolling Machine

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Roll diameter	350 mm
Tape width	8-50 mm
Speed	110 m/min
Motor	1 HP + inverter
Control	Digital counter; automatic stop

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSF-H02 Ribbon Rolling Machine

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Roll diameter	350 mm
Tape width	8-50 mm
Speed	110 m/min
Motor	1 HP
Control	Manual counter

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSF-H03 Ribbon Rolling Machine

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Roll diameter	350 mm
Tape width	8-50 mm
Speed	110 m/min
Motor	1 HP
Control	Automatic counter; speed control

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-FT Vertical Tape Winding Machine

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Tape width	2-15 cm
Speed	100 m/min
Power	2 kW

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSF-LA TP5 Non-film Tipping Machine

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Reference output	5 pieces/cycle; 8,000 pieces/8 h
Tip shapes	Square, round, triangular, oval
Materials	SP, nylon, PP and polyester; confirm yarn grade
Temperature	180-250 C
Power consumption	2 kWh/h
Tooling	Matched to shoelace thickness
Net weight	200 kg
Machine dimensions	700 x 900 x 1,550 mm
Compressor power	3.5 kW

CONFIGURATION

PLC control / Automatic temperature control

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

Automatic Lace Tipping Machine - 150 cm

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Cutting length	0.4-1.5 m
Reference output	40 pieces/min
Temperature	50-60 C
Machine dimensions	2,500 x 1,150 x 1,700 mm
Net weight	550 kg

CONFIGURATION

Automatic stop / Electronic length counter

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

Automatic Lace Tipping Machine - 250 cm

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Cutting length	0.4-2.5 m
Reference output	25 pieces/min
Temperature	50-60 C
Machine dimensions	3,500 x 1,150 x 1,700 mm
Net weight	700 kg

CONFIGURATION

Automatic stop / Electronic length counter

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSS-C85 Plastic-film tipping

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Motor	3 HP / 380 V
Machine dimensions	2,300 x 1,150 x 1,700 mm
Net weight	450 kg
Film widths	25 / 30 / 32 / 40 / 50 mm
Tooling diameters	1.9 / 2.1 / 2.3 / 2.5 / 2.8 / 3.0 / 3.5 / 3.7 / 4.0 / 4.2 / 4.5 / 4.7 / 5.0 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSK-LS Semi-automatic Lace Tipping Machine

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Motor	1 HP
Power supply	440 V
Machine dimensions	800 x 650 x 900 mm
Net weight	160 kg

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-H Semi-automatic Metal Tipping Machine

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Operation	Electric
Power supply	220 V
Machine dimensions	600 x 350 x 900 mm
Net weight	35 kg

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSX-HC Semi-automatic Metal Tipping Machine

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Operation	Hydraulic
Power supply	220 V
Machine dimensions	600 x 350 x 900 mm
Net weight	40 kg

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

Semi-automatic Metal Tipping Machine - 60 kg

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Power supply	220 V
Machine dimensions	600 x 350 x 900 mm
Net weight	60 kg

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YS-FD106 Shoelace Waxing and Polishing Machine

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Speed	6-10 m/min
Motor	2 1/4 HP, three-phase
Heater power	2.4 kW
Current rating	17 A
Machine dimensions	2,510 x 850 x 1,785 mm

CONFIGURATION

Automatic temperature control / Variable frequency control

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-FS/2S1 Finishing and Starching Machine - 600 mm rollers

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Roller dimensions	600x1500 mm
Rollers	2
Baths	1
Motor	4 HP
Tape paths	1-6
Line speed	30 m/min per strip
Heating options	Electric / natural gas / CNG / steam

CONFIGURATION

Automatic temperature control / Variable frequency control / Adjustable tension

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-FS/2S2 Finishing and Starching Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Roller dimensions	600x1500 mm
Rollers	2
Baths	2
Motor	4 HP
Tape paths	1-6
Line speed	30 m/min per strip
Heating options	Electric / natural gas / CNG / steam

CONFIGURATION

Automatic temperature control / Variable frequency control / Adjustable tension

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-FS/2H Finishing and Starching Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Roller dimensions	600x1500 mm
Rollers	2
Baths	1
Motor	4 HP
Tape paths	1-6
Line speed	30 m/min per strip
Heating options	Electric / natural gas / CNG / steam

CONFIGURATION

Automatic temperature control / Variable frequency control / Adjustable tension

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-FS/6 Finishing and Starching Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Roller dimensions	780x800 mm
Rollers	6
Baths	1
Motor	4 HP
Tape paths	1-6
Line speed	30 m/min per strip
Heating options	Electric / natural gas / CNG / steam

CONFIGURATION

Automatic temperature control / Variable frequency control / Adjustable tension

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-TFS/8 Finishing and Starching Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Roller dimensions	780x800 mm
Rollers	8
Baths	1
Motor	4 HP
Tape paths	1-6
Line speed	30 m/min per strip
Heating options	Electric / natural gas / CNG / steam

CONFIGURATION

Automatic temperature control / Variable frequency control / Adjustable tension

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-FS/12TM Finishing and Starching Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Roller dimensions	780x800 mm
Rollers	12
Baths	1
Motor	4 HP
Tape paths	1-6
Line speed	30 m/min per strip
Heating options	Electric / natural gas / CNG / steam

CONFIGURATION

Automatic temperature control / Variable frequency control / Adjustable tension

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-FS/L1 Finishing and Starching Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Roller dimensions	780x800 mm
Rollers	1
Baths	1
Motor	4 HP
Tape paths	1-6
Line speed	30 m/min per strip
Heating options	Electric / natural gas / CNG / steam

CONFIGURATION

Automatic temperature control / Variable frequency control / Adjustable tension

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YS-LX08 Pre-shrinking Machine

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Machine dimensions	7,000 x 2,500 x 2,600 mm
Power	10 kW
Power supply	AC 380 V
Temperature	60-120 C
Working width	450 mm
Heating options	Oil / steam / electric
Control	PLC
Net weight	900 kg

CONFIGURATION

PLC control

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YS-GT1300 BOPP Tape Slitting Machine

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Equipment type	Bopp Slitter



Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YS-GT500 Paper Core Cutter

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Cutting width	10-500 mm
Core inner diameter	76.2 mm
Core wall thickness	3-5 mm
Air pressure	5 kg/cm2
Machine dimensions	1,500 x 900 x 1,200 mm
Net weight	300 kg

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

Paper Core Loader - 1,300 mm

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Loading length	1,300 mm
Loading speed	1 m/s
Core inner diameter	25.4-76.2 mm
Air pressure	5 kg/cm2
Machine dimensions	600 x 1,000 x 1,650 mm
Net weight	300 kg

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YS-GT300 Tape Rewinding Machine

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Core inner diameter	25.4-76.2 mm
Speed	0-180 m/min
Machine dimensions	500 x 500 x 500 mm
Net weight	100 kg

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-S302 Warping Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Yarn creel	192
Motor	2 HP
Line speed	Up to 600 m/min
Beam diameter	400 mm
Beam inner length	300 mm

CONFIGURATION

Yarn-break stop / Electronic length counter / Variable frequency control

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-S303 Warping Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Yarn creel	256
Motor	2 HP
Line speed	Up to 600 m/min
Beam diameter	400 mm
Beam inner length	300 mm

CONFIGURATION

Yarn-break stop / Electronic length counter / Variable frequency control

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-S304 Warping Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Yarn creel	300
Motor	2 HP
Line speed	Up to 600 m/min
Beam diameter	400 mm
Beam inner length	300 mm

CONFIGURATION

Yarn-break stop / Electronic length counter / Variable frequency control

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-SA60 Elastic Yarn Warping Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Yarn creel	60
Main motor	2 HP
Rubber-frame motor	2 HP
Line speed	Up to 400 m/min
Beam diameter	400 mm
Beam inner length	300 mm

CONFIGURATION

Adjustable tension / Electronic length counter / Yarn-break stop / Variable frequency control

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-SA80 Elastic Yarn Warping Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Yarn creel	80
Main motor	2 HP
Rubber-frame motor	2 HP
Line speed	Up to 400 m/min
Beam diameter	400 mm
Beam inner length	300 mm

CONFIGURATION

Adjustable tension / Electronic length counter / Yarn-break stop / Variable frequency control

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-SA120 Elastic Yarn Warping Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Yarn creel	120
Main motor	2 HP
Rubber-frame motor	1.5 + 1.5 HP
Line speed	Up to 400 m/min
Beam diameter	400 mm
Beam inner length	300 mm

CONFIGURATION

Adjustable tension / Electronic length counter / Yarn-break stop / Variable frequency control

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-D300 Double-head Warping Machine

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Yarn creel	300
Motor	2 HP x 2
Line speed	600 m/min
Beam diameter	400 mm
Beam inner length	300 mm

CONFIGURATION

Yarn-break stop / Electronic length counter / Variable frequency control

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

Sample Warping Machine - 12 ends

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Motor	0.75 kW / 220 V
Maximum ends	12 ends
Machine dimensions	1,600 x 620 x 900 mm
Creel dimensions	600 x 600 x 900 mm
Net weight	150 kg

CONFIGURATION

PLC control / Automatic stop

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-B128A Rubber Yarn Covering Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Machine dimensions	9000x1000x1700 mm
Power	9.5 kW
Spindles	128 pcs
Heads	64Heads
Spindle speed	9000-16000 rpm
Covering twist	200-300 turns/m
Twist direction	S or Z
Bobbin size	D84xd36xL140
Draw ratio	2.4-6
Yarn package weight	Less than 1000g
Package forming	Mechanical Forming/ E-traverse
Take-up bobbin	(D 48 xL160)mm
Speed control	INVERTERS

CONFIGURATION

Variable frequency control

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-B160A Rubber Yarn Covering Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Machine dimensions	11000x1000x1700 mm
Power	9.5 kW
Spindles	160 pcs
Heads	80Heads
Spindle speed	9000-16000 rpm
Covering twist	200-300 turns/m
Twist direction	S or Z
Bobbin size	D84xd36xL140
Draw ratio	2.4-6
Yarn package weight	Less than 1000g
Package forming	Mechanical Forming/ E-traverse
Take-up bobbin	(D 48 xL160)mm
Speed control	INVERTERS

CONFIGURATION

Variable frequency control

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YS-PC1300DF Paper Cutting Machine

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Cutting width / height / length	130 x 13 x 130 cm
Main motor	4.0 kW
Net weight	3,800 kg
Width options	280 / 250 cm
Length / table height	249 / 90 cm

CONFIGURATION

Touchscreen operation

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YS-DC930 Creasing and Die Cutting Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Chase size	930 x 670 mm
Rule length	<25 m
Net weight	3,000 kg
Machine dimensions	1850 x 1880 x 1700 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YS-DC1040 Creasing and Die Cutting Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Chase size	1040 x 720 mm
Rule length	<28 m
Net weight	3,500 kg
Machine dimensions	2000 x 2010 x 1900 mm

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSK-FD Tape Festooning Machine

Product configuration and technical specifications.



TECHNICAL SPECIFICATIONS

Tape width	8-50 mm
Speed	100 m/min
Box size	330 x 330 x 250 mm
Motor	1 HP

CONFIGURATION

Electronic length counter

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-FD2 Oscillating Tape Packing Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Tape width	4-50 mm
Packing footprint	330 x 330 mm
Speed	110 m/min
Motor	2 HP

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com

EQUIPMENT & MATERIALS

YSL-FD4 Oscillating Tape Packing Machine

Series reference image. Refer to the selected configuration below.



TECHNICAL SPECIFICATIONS

Tape width	4-50 mm
Packing footprint	330 x 330 mm
Speed	110 m/min
Motor	2.5 HP

Working output depends on material and configuration. Confirm the final specification with Yishuo.

NINGBO YISHUO MACHINERY AND ELECTRON CO., LTD.

Lloyd Jiang | WhatsApp: +86 130 4549 3235 | lloyd.jiang@nbyishuo.com